

Navigation Map Data (NaviGo™ powered by Telogis®) – Installation Instructions for the MCP110 and MCP200

This document provides instructions on loading updated map data for NaviGo™ powered by Telogis® on the MCP110 and MCP200 using the provided USB memory sticks.

Before You Start

Ensure the current MCP software is AA1117R or newer. To check the software version, tap the Home/System/Version buttons.

IMPORTANT!!!

Do NOT remove power during map install.

Do NOT remove the USB memory stick during map install.

Upgrading the NaviGo™ powered by Telogis® Map Data

1. Insert the USB memory stick into the DIU.

- The USB Map Install Detected message appears.

Note: If USB stick insertion is not detected within 10 seconds, try removing and re-inserting it.



- The Please wait, shutting down message appears.



- After a normal boot sequence, the Installing MapData message appears.


Note: This step takes 20 to 40 minutes to complete.




- The Disclaimer Warning page appears.



2. Tap OK.
3. To ensure the correct maps were installed, tap Navigation from the MCP Home page.

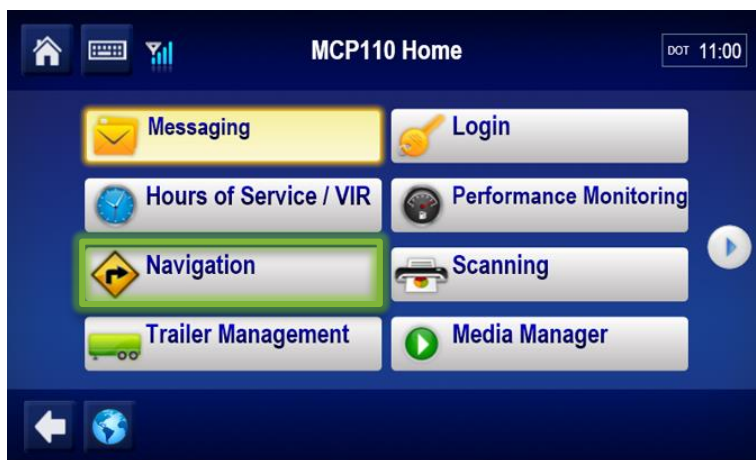

4. At the bottom, left corner of the NaviGo Home Page, ensure the version you installed displays at the bottom of the page.

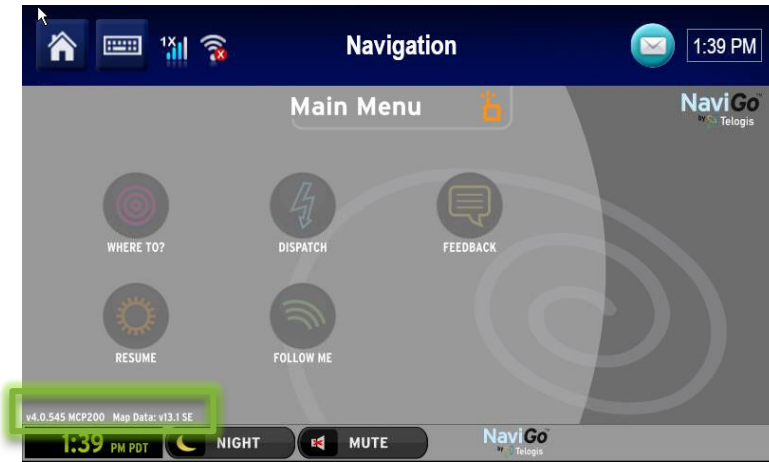

Omnitracs, LLC
717 N. Harwood Street, Suite 1300
Dallas, TX 75201 U.S.A.

© 2013-2015 Omnitracs, LLC. All rights reserved. Omnitracs is a trademark of Omnitracs, LLC. All other trademarks are the property of their respective owners.

Omnitracs endeavors to ensure that the information in this document is correct and fairly stated, but Omnitracs is not liable for any errors or omissions. Published information may not be up to date, and it is important to confirm current status with Omnitracs.

This technical data may be subject to U.S. and international export, re-export or transfer (export) laws. Diversion contrary to U.S. and international law is strictly prohibited.

80-JB906-1 Rev. F
July 2015